



Analysis Of The Axial Bearing Capacity And Settlement Of Bored Pile Foundations Using The Finite Element Method (Case Study: Construction Of The Sumatera Main Stadium)

*Annisa Suci Rizky¹, Ika Puji Hastuty², Syiril Erwin Harahap³

^{1,2,3}Teknik Sipil, Universitas Sumatera Utara, Kota Medan

*)Corresponding autor: anisasucirizky12@gmail.com

Received: 06 Mei 2026 Revised: 12 Mei 2026 Accepted: 27 Mei 2026

Abstract

Bored pile foundations are one type of deep foundation used to support axial loads in building construction. This study aims to analyze the ultimate bearing capacity and settlement of a single bored pile foundation in the North Sumatra Main Stadium Project located in Batang Kuis District, Deli Serdang Regency, North Sumatra Province. The analysis was carried out on a bored pile with a diameter of 80 cm using three methods, namely the Chin Method, the Mazurkiewicz Method, and the Finite Element Method (FEM). The data used in this study were obtained from the Static Loading Test (SLT). The results indicate differences in the ultimate bearing capacity (Q_u) and foundation settlement values produced by each method due to variations in their approaches to interpreting the load-settlement relationship. The Chin Method produced the highest Q_u value of 617 tons with a settlement of 75 mm, indicating a more optimistic result and serving as the upper bound. The Mazurkiewicz Method produced a Q_u value of 590.65 tons with a settlement of 60 mm, while the FEM analysis produced a Q_u value of 600 tons with a settlement of 65 mm. Based on these results, the Mazurkiewicz Method is considered sufficiently representative because it provides values between conservative and optimistic approaches. Therefore, the use of more than one analysis method is highly recommended to obtain more accurate and reliable results in bored pile foundation design.

Keywords: Bearing Capacity, Settlement, Bored Pile, Finite Element Method

Abstrak

Pondasi bored pile merupakan salah satu jenis pondasi dalam yang digunakan untuk menahan beban aksial pada konstruksi bangunan. Penelitian ini bertujuan untuk menganalisis kapasitas daya dukung ultimit dan penurunan pondasi bored pile tunggal pada Proyek Stadion Utama Sumatera Utara di Kecamatan Batang Kuis, Kabupaten Deli Serdang, Provinsi Sumatera Utara. Analisis dilakukan pada bored pile berdiameter 80 cm dengan menggunakan tiga metode, yaitu Metode Chin, Metode Mazurkiewicz, dan Metode Elemen Hingga (Finite Element Method/FEM). Data yang digunakan berasal dari hasil Uji Pembebanan Statik (Static Loading Test/SLT). Hasil penelitian menunjukkan adanya perbedaan nilai kapasitas daya dukung ultimit (Q_u) dan penurunan pondasi dari masing-masing metode akibat perbedaan pendekatan dalam menginterpretasikan hubungan beban dan penurunan. Metode Chin menghasilkan nilai Q_u tertinggi sebesar 617 ton dengan penurunan 75 mm sehingga cenderung lebih optimis dan dapat dijadikan sebagai batas atas (upper bound). Metode Mazurkiewicz menghasilkan nilai Q_u sebesar 590,65 ton dengan penurunan 60 mm, sedangkan analisis FEM menghasilkan nilai Q_u sebesar 600 ton dengan penurunan 65 mm. Berdasarkan hasil tersebut, Metode Mazurkiewicz dinilai cukup representatif karena menghasilkan nilai yang berada di antara pendekatan konservatif dan optimis. Oleh karena itu, penggunaan lebih dari satu metode analisis sangat disarankan untuk memperoleh hasil yang lebih akurat dan dapat diandalkan dalam perencanaan pondasi bored pile.

Kata kunci: Daya Dukung, Penurunan, Bored Pile, Metode Elemen Hingga

INTRODUCTION

Large-scale infrastructure projects, such as stadiums, require structural and foundation systems capable of safely and reliably supporting significant loads. As wide-span structures with large capacities, stadiums are subjected to various types of loads, including dead loads, live loads, and other loads acting on the superstructure, which must be effectively transferred to the soil through the foundation system (Truty, 2024). Foundations serve as the lower structural elements that transfer all loads from the superstructure to the ground, which possesses adequate bearing capacity, thereby ensuring the building's stability. Consequently, foundation design is a critical factor in ensuring safety, structural performance, and the long-term functionality of the building (Satria & Rasidi, 2021).

The North Sumatra Main Stadium, located in the North Sumatra Sport Center area, Deli Serdang Regency, is planned to serve as the main stadium for the 21st National Sports Week (PON). In this project, a deep foundation system in the form of bored piles with a diameter of approximately 80 cm is used to support the load of the superstructure. The selection of bored piles as the foundation type is based on surface soil conditions that have relatively low bearing capacity or consist of unstable soil layers, so that the structural load needs to be transferred to deeper soil layers with better mechanical characteristics (Das & Sobhan, 2014).

Bored pile foundations bear axial loads through a combination of end bearing and skin friction. In the design of pile foundations, not only must the bearing capacity be considered (Siemaszko, 2024), but also soil deformation, as indicated by the amount of settlement. The settlement value is influenced by various factors such as soil mechanical properties, soil–structure interaction, pile configuration, and construction methods (Chen & Chen,

2024). Excessive foundation settlement or differential settlement can cause structural damage and reduce building performance, making settlement analysis a critical aspect of deep foundation design (Gendy, 2025).

Analysis of large-diameter bored pile foundations increasingly employs numerical approaches based on the Finite Element Method (FEM). This method can model soil–foundation interaction more realistically than conventional analytical methods (Brinkgreve et al., 2018). Other studies indicate that the finite element method can better describe the load–settlement relationship of bored pile foundations because it accounts for nonlinear soil behavior and soil–structure interaction (Pham et al., 2024). Furthermore, studies on bored pile foundation analysis indicate that the FEM is widely used for large-diameter pile foundations because it can simulate field conditions more closely to actual conditions (kaiser, 2025). In addition, studies on the analysis of bored pile foundations indicate that the FEM is widely used for large-diameter pile foundations because it can simulate field conditions more closely to actual conditions (Mungkur et al, 2025).

Based on this literature review, the scientific novelty (state of the art) of this study lies in the application of the finite element method with a Hardening Soil model to analyze the axial bearing capacity and settlement of bored pile foundations for the North Sumatra Main Stadium project in an integrated manner, as well as directly comparing these results with those from static loading tests conducted in the field. Similar studies are still limited to locations with different geotechnical conditions, so validation of the actual foundation behavior at the study site is necessary. It is hoped that this novel contribution can provide a reference for the design of bored pile foundations in projects with relatively unstable soil conditions in the North Sumatra region.

The research questions in this study are: (1) what are the differences in the axial bearing capacity of bored pile foundations between the results of static loading tests and the results of numerical analysis using FEM?; (2) how do the axial settlement values of bored pile foundations compare between field test results

and numerical analysis results?; (3) To what extent can the soil parameters used in numerical modeling represent the actual behavior of bored pile foundations in the field?

This study has the following scope limitations: (1) the project data used in this study was collected from the construction of the North Sumatra Main Stadium Sports Center, located in Sena Village, Batang Kuis Subdistrict, Deli Serdang Regency; (2) the data used consists of results from static loading tests conducted by the contractor, as well as some data from the correlation of bore logs and SPT (Standard Penetration Test) results; (3) the analysis focuses solely on calculating the axial bearing capacity of single bored piles and the elastic settlement of bored pile foundations; (4) the analysis uses the finite element method (FEM) with a Hardening Soil model; (5) the analysis results cover only the axial bearing capacity of the bored pile and the elastic settlement of the bored pile; (6) this study does not discuss the lateral behavior of the foundation, does not analyze the effects of seismic loads, and does not include pile group analysis.

The objectives of this study are: (1) to analyze and compare the axial bearing capacity of bored pile foundations between the results of static loading tests and the results of numerical analysis using FEM;

$$Q_u = Q_p + Q_s$$

(2) to evaluate the comparison of axial settlement values of bored pile foundations between field test results and numerical analysis results; (3) to assess the representativeness of soil parameters used in numerical modeling regarding the actual behavior of bored piles in the field.

Basic Concepts of Bored Pile Foundations

A bored pile foundation is a foundation shaped like a long tube (Hutapea & Roesyanto, 2021), created by first drilling into the ground using a drilling rig, then filling the drilled hole with steel reinforcement and concrete (Waheed & Asmael, 2023). Bored pile foundations are classified as deep foundations designed to support heavy building structures. Loads acting on a building are borne by the building structure and transmitted to the foundation to be transferred to the ground. (Banta, 2025; Yuliawan & Rahayu, 2018).

Axial Bearing Capacity of Piles

The test load applied is 200% of the design load, with incremental increases of 25% of the design load. However, if failure occurs before reaching the maximum load, the testing process is stopped. Further loading is performed only if the settlement rate does not exceed 0.25 mm per hour (or 0.01 inch per hour), and each stage does not exceed two hours in duration. If failure occurs, the maximum load applied may be unloaded after a 12-hour rest period, provided that the settlement during the last hour does not exceed 0.25 mm (0.01 inch). If the settlement is still greater than 0.25 mm, the load must be maintained for 24 hours. ASTM (2013). Standard Test Methods for Deep Foundations Under Static Axial Compressive Load (ASTM D1143/D1143M-07). ASTM International, West Conshohocken, PA.

Table 1 Cyclic Loading: Loading-Unloading Procedure

Cyclic 1	0%	25%	50%	25%	0%					
Cyclic 2	0%	50%	75%	100%	75%	50%	0%			
Cyclic 3	0%	50%	100%	125%	150%	125%	100%	50%	0%	
Cyclic	0%	50%	100%	150%	175%	200%	150%	100%	50%	0%


Sumber : (ASTM D1143)

Intepretasi Loading Test

The ultimate bearing capacity (Q_u) of bored pile foundations can be determined based on Static Loading Test (SLT) data using the Chin and Mazurkiewicz methods. The Chin method uses a linear relationship between the settlement-to-load ratio (s/Q) and settlement (s), expressed as:

$$s/Q = C_1s + C_2$$

A graph is plotted of s/Q versus s , and the Q_u value is obtained from the inverse of the slope of the line ($1/\text{slope}$). This method tends to yield higher (more optimistic) values. The Mazurkiewicz method uses a direct relationship between load (Q) and settlement (s) in graphical form. The Q_u value is determined from the point where the interpretation line intersects the load-settlement curve. This method is graphical and generally yields more conservative results. Using both methods together can provide more accurate results in determining the ultimate bearing capacity of the foundation.

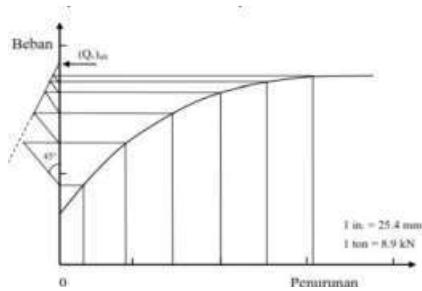

Gambar 1. Graph showing the relationship with the Mazurkiewicz method's decline

Intepretasi Loading Test

In geotechnical analysis using the finite element method, soil models are used to represent the mechanical behavior of soil under loading. The Mohr-Coulomb (MC) model is a simple elastic-plastic model based on shear failure criteria, with the primary parameters being cohesion (c) and internal friction angle (ϕ). This model assumes a linear stress–strain relationship up to the yield point, making it widely used for preliminary analyses due to its simplicity. However, it has limitations in describing nonlinear soil behavior and changes in stiffness due to strain level (Das & Sobhan, 2014).

The Hardening Soil (HS) model is a more advanced elastoplastic model capable of describing soil behavior nonlinearly by considering the influence of stress level on soil stiffness. This model uses stiffness parameters such as the secant modulus (E_{50}), oedometer modulus (E_{oed}), and reloading modulus (E_{ur}). Additionally, this model can represent the phenomenon of strain hardening as well as the difference in response between initial loading and reloading, thereby providing more realistic results in deformation analysis and soil–structure interaction (Schanz, Vermeer & Bonnier, 1999).

Thus, the Mohr-Coulomb model is simpler and suitable for preliminary analysis, while the Hardening Soil model is more accurate for deformation analysis and complex soil conditions.

METHOD

Research Location

This study was conducted as part of the construction project for the North Sumatra Main Stadium, located in Sena Village, Batang Kuis Subdistrict, Deli Serdang Regency, North Sumatra, and included:

1. Static Load Test on 80 cm diameter bored pile foundations
2. Collection of SPT data from soil investigation results (borehole log BH-3).
3. Numerical simulation using PLAXIS 3D.

Soil Parameters

Lapisan	Kedalaman (m)	Tipe Tanah	N _s -SPT	γsat (kN/m ³)	c' (kPa)	φ' (°)	E ₅₀ (kPa)	E _{oed} (kPa)
1	0-2,9 - 0	Timbunan	-	17,85	0	23,1	16000	16000
2	0 - 7	Silty Clay (lembek)	6	16,80	16,5	23,4	1996	1996
3	7 - 14	Silty Sand (lembek)	8	18,05	14,4	24,0	3324	3324
4	14 - 20	Silty Sand (sedang)	23	17,35	0	23,1	3854	3854
5	20 - 34	Silty Sand (padat)	55	17,35	0	23,1	4991	4991
6	34 - 40	Silty Clay (lembek)	20	18,73	10,6	23,4	3842	3842
7	40 - 50	Arxivium	70	18,48	15,6	23,4	4679	4679

Research Diagram

This study followed the following systematic steps:

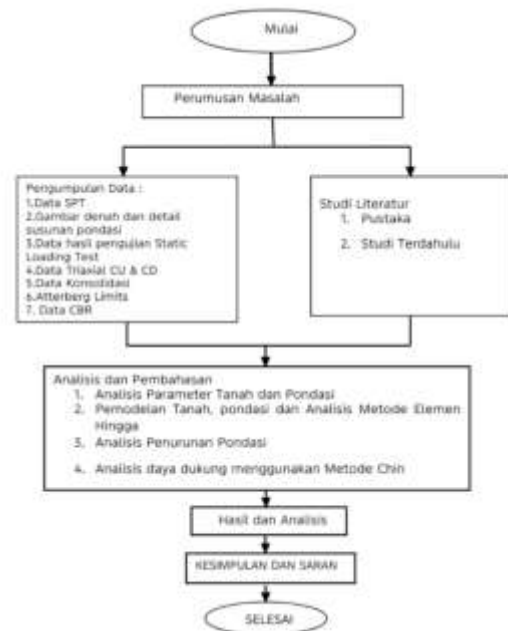


Figure 2 Research Flowchart

RESULTS AND DISCUSSION

Interpretation of Load Test Results

The load-settlement curve from the static load test (200% of design load / 400 tons) yielded three estimates of ultimate capacity:

Chin Method : 617.895 tons

Mazurkiewicz Method : 590.65

The Mazurkiewicz value is considered sufficiently representative because it lies

between the conservative and optimistic values.

Numerical Simulation with PLAXIS 3D

Finite element modeling provides results consistent with field data (Table 1):

Table 2 Comparison of Simulation Results

Parameter	Chin	Mazurkiewicz	FEM
Qu (ton)	617.895 ton	590.65 ton	600 ton
Penurunan (mm)	23,98 mm	24 mm	99,806 mm

The results of numerical simulations using the finite element method (FEM) indicate an ultimate bearing capacity (Q_u) of 600 tons, which falls between the results of the Chin method (617.895 tons) and the Mazurkiewicz method (590.65 tons). This indicates that the simulation results show a fairly consistent trend with field interpretation data, particularly falling within the range of conservative and optimistic values. In terms of settlement, the Chin and Mazurkiewicz methods provide relatively consistent values, namely 23.98 mm and 24 mm, respectively. Meanwhile, the FEM simulation results show a significantly larger settlement value of 99.806 mm. This difference indicates that numerical models tend to provide deformation predictions that are more sensitive to the soil parameters and boundary conditions used in the modeling. Overall, the Mazurkiewicz method can be considered more representative in describing actual field conditions because it produces more conservative values. On the other hand, the FEM simulation results show a trend that approaches the average value of the two interpretation methods, so they can be used as an additional verification tool in foundation bearing capacity analysis.

CONCLUSION

Based on the research objective to analyze and compare the axial bearing capacity of bored pile foundations and their reduction between the results of static loading tests (Chin and Mazurkiewicz methods) and the results of FEM numerical analysis, the following conclusions were drawn:

1. There are variations in the ultimate bearing capacity (Q_u) values among the three methods used. This variation indicates that no single method is entirely definitive, so convergence of results across methods must be considered in design.
2. The Chin method yields the highest Q_u value of 617.895 tons with a settlement of 23.98 mm, reflecting the most optimistic approach and thus serving as an upper bound for foundation capacity estimates.
3. The Mazurkiewicz method yields a Q_u value of 590.65 tons with a settlement of 24 mm. This value falls between the conservative and optimistic results, making it sufficiently representative of the field conditions in this study.
4. Numerical analysis using FEM yields a Q_u value of 600 tons, but with a settlement of 99.806 mm, which is significantly greater than that of the other two methods. This indicates that FEM is more sensitive in modeling soil deformation due to the use of the Hardening Soil model and more realistic soil-structure interaction.
5. The differences in the results obtained are due to the differing approaches of each method in interpreting the load-settlement relationship. The Chin and Mazurkiewicz methods are based on the extrapolation of field test curves, while the FEM numerically accounts for the nonlinear behavior of the soil.
6. The scientific findings of this study confirm that the use of more than one method is highly recommended to obtain more accurate and reliable estimates of bearing capacity, especially in large-scale infrastructure projects such as the North Sumatra Main Stadium.

ACKNOWLEDGMENTS

The author offers heartfelt thanks and praise to Allah, the Exalted and Glorious, for all the mercy, guidance, and ease He has bestowed, enabling this research to be successfully completed. The author also extends sincere gratitude to his beloved parents for their prayers, moral support, and immeasurable sacrifices throughout his education and the conduct of this research. Thanks are also extended to the contractor for the North Sumatra Main Stadium project, the geotechnical engineering team, and all parties

who assisted in data collection and ensured the smooth conduct of field research.

REFERENCES

- Banta Chairullah. (2013). ANALISA DAYA DUKUNG PONDASI DENGAN METODA SPT, CPT, DAN MEYERHOF PADA LOKASI RENCANA KONSTRUKSI PLTU NAGAN RAYA PROVINSI ACEH. *Teras Jurnal*, 3, 15–24.
- Bonar Lumsa Mungkur¹, Roesyanto², Syiril Erwin Harahap³, I. J. F. (2025). *Analisis Daya Dukung Aksial dan Penurunan Pondasi Bored Pile dengan Menggunakan Uji Beban Statik dan Menggunakan Metode Elemen Hingga Pada Pembangunan Bri-Medan*. 10 No 7.
- Brinkgreve, R. B. J., Kumarswamy, S., & Swolfs, W. M. (2018). *PLAXIS 2D Reference Manual*. Bentley Systems.
- Chen, Z., & Chen, Z. (2024). Study of the one-dimensional consolidation and creep of clays with different thicknesses using different hypotheses and three elastic viscoplastic models. *Acta Geotechnica*, 19(11), 7329–7347. <https://doi.org/10.1007/s11440-024-02405-w>
- Das, B.M., & Sobhan, K. (2014). *Principle of Geotechnical Engineering*. Cengage Learning.
- Dewi Sartika Hutapea, Roesyanto, R. I. (2021). ANALISIS DAYA DUKUNG DAN PENURUNAN PONDASI TIANG BOR DENGAN PLAXIS 3D TERHADAP HASIL LOADING TEST. *Jurnal Syntax Admiration*.
- Gendy, M. El. (2025). Reliable Prediction of Bored Pile Load - Settlement Response using Machine Learning and Monte Carlo Simulations. In *Geotechnical and Geological Engineering* (Vol. 43, Issue 9). Springer International Publishing. <https://doi.org/10.1007/s10706-025-03397-4>.
- Kaisar, M. V., & Erwin, S. (2025). *ANALISIS DAYA DUKUNG AKSIAL TIANG DIAMETER 60 CM DENGAN MENGGUNAKAN UJI BEBAN STATIK AKSIAL DAN MENGGUNAKAN METODE ELEMEN HINGGA PADA PROYEK GEDUNG RAWAT INAP TOWER-1 RS HAJI MEDAN*. 6(2), 187–197. <https://doi.org/10.51988/jtsc.v6i2.303>
- Pham, T. A., Nadimi, S., & Sutman, M. (2024). Computers and Geotechnics Softening-based interface model and nonlinear load-settlement response analysis of piles in saturated and unsaturated multi-layered soils. *Computers and Geotechnics*, 171(March), 106331. <https://doi.org/10.1016/j.compgeo.2024.106331>
- Satria, F. I., & Rasidi, N. (2021). *ANALISIS ULANG PERENCANAAN PONDASI TIANG PANCANG PADA TRIBUN ZONA 15 PROYEK PEMBANGUNAN JAKARTA INTERNATIONAL*. 2, 179–182.
- Schanz, T., Vermeer, P.A., & Bonnier, P. G. (1999). *The Hardening Soil Model: Formulation and Verification. Proceedings of the International Symposium on Beyond 2000 in Computational Geotechnics*.
- Siemaszko, P. (2024). *Pile – Soil Interaction during Static Load Test*. 46(3), 164–175.
- Truty, A. (2024). Estimating Hardening Soil - Brick model parameters for sands based on CPTU tests and laboratory experimental evidence. *Scientific Reports*, 1–17. <https://doi.org/10.1038/s41598-024-65789-5>.
- Waheed, M., & Asmael, N. (2023). *STUDY IMMEDIATE AND CONSOLIDATION*. 0(0). <https://doi.org/10.2478/cee-2023-0028>.

Yuliawan, E., & Rahayu, T. (2018). Analisis Daya Dukung Dan Penurunan Pondasi Tiang Berdasarkan Pengujian Spt Dan Cyclic Load Test. *Jurnal Konstruksia*, 9(2), 1–13.